
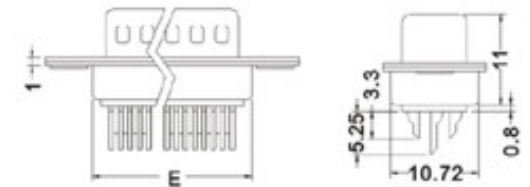


# DHS...



## D-SUB H.D. SOLDER TYPE

Position	A	B	C	D	E	F
15	30.9	17.7	2.29	24.99	19.3	16.33
26	39.1	25.3	2.29	33.32	27.5	24.7
44	53.0	39.0	2.29	47.04	41.3	38.4
62	69.3	55.4	2.41	63.50	57.7	54.8

### [ MALE ]

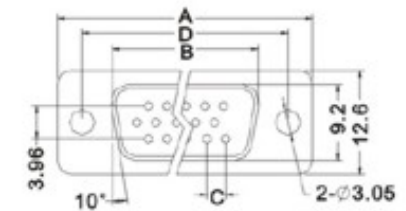

### [ FEMALE ]

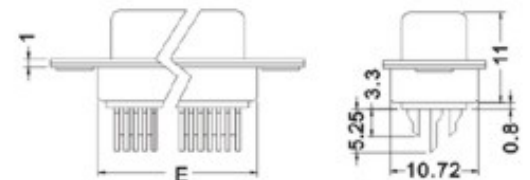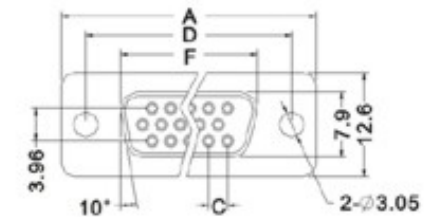

### Specifications:

Contact Resistance: 30m  $\Omega$  max.at DC 100 mA  
Insulator Resistance: 1000M  $\Omega$  min.at DC 500V  
Current Rating: 3AMP

### Dielectric Withstanding

Voltage: AC 1000V For 1 minute  
Operating Temperature: -55° C--+105° C  
Contact: Brass or Phosphor Bronze  
Housing: PBT &30% Glass Fiber(UL 94V-0)