
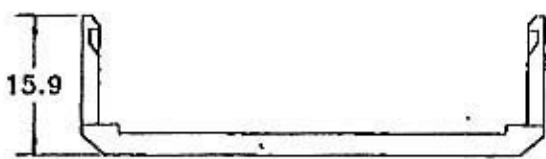

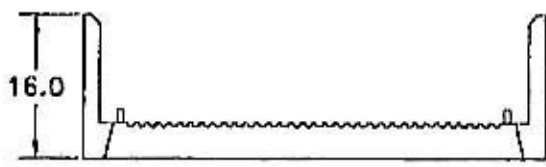



POSITION	A	B
10	22.36	10.16
14	27.44	15.24
16	29.98	17.78
20	35.06	22.86
26	42.68	30.48
34	52.84	40.64
40	60.46	48.26
44	65.54	53.34
50	73.16	60.96
56	80.78	68.58
60	85.86	73.66
62	88.40	76.20
64	90.94	78.74

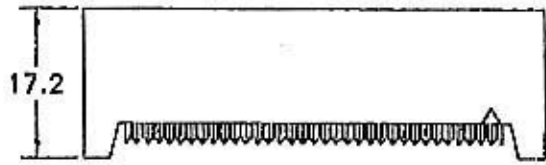

SPECIFICATIONS

Material
 Insulator: PBT, glass reinforced, rated UL 94V-0
 Contact: Phosphor Bronze or Brass

Electrical
 Current Rating: 1 Amp
 Contact Resistance: 30 mΩ max.
 Insulation Resistance: 3000 MΩ min.
 Dielectric Withstanding Voltage: 500V AC for 1 minute
 Operating Temperature: -40°C to +105°C

† Terminated with 1.27mm pitch flat ribbon cable.

UNLESS OTHERWISE SPECIFIED TOLERANCE	
.X	± 0.3
.XX	± 0.2
.XXX	± 0.1

玄茂科技股份有限公司
 HSUAN MAO TECHNOLOGY CO., LTD.

UNIT		SCALE	PART NAME	
MM			2.54mm EDGE CARD IDC TYPE W/O NOSE	
APPD.	CKD.	TOLERANCE	PART NO.	REV.
		± 0.1	C2900-XXXXXB00 R	A

制表日: 2004/02/04

DRAWING.	APPROVED
Kevin	