


F:\NCZT\USB1394\1

4

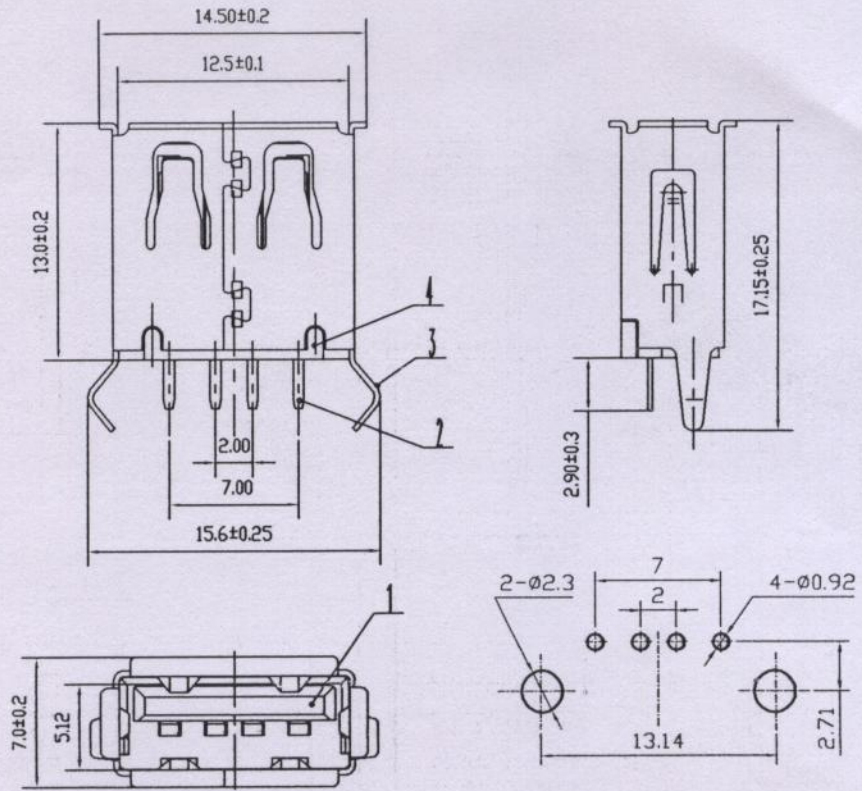

Specification

Housing: Thermoplastic, UL94V-0
 Temperature Range: -20°C to +85°C
 Contact: Copper Alloy
 Shell: Copper Alloy
 Voltage Current Rating: 1AMP, 30V AC
 Insulation Resistance: 1000MΩ Min
 Contact Resistance: 30mΩ Max
 Dielectric Withstanding Voltage: 500V AC
 Tolerances unless otherwise specified:
 0-10±0.15; 10-20±0.2; 20-30±0.25

金控文件
 2005-1-02

东莞华电子有限公司
 2005-1-02
 文件发行章

Enrol								
Tracing	3	W	USB-A1 DIP180° JACK SHELL	1	H65Y			
Tracing	2	J	USB-A1 DIP180° JACK TERMINAL	4	QSn6.5-0.1			
	1	X	USB-A1 DIP180° JACK HOUSING	1	PBT			
	NO	CODE	P/N	QTY	MATERIAL	REMARK		
Signing			USB - A1D4F-□□4□					
			USB A1 DIP 180° JACK (001)					
			QTC-A-025					
Date	Design	Criterion				Drawing Marking	Weight	Scale
	Collate	Examine				A/0		2.5:1
	Examine	Approval				Common Page	Page	
	Technics	Date				CZT		