
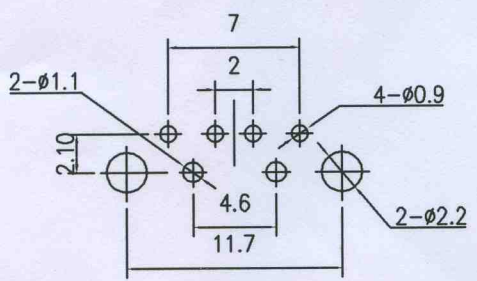
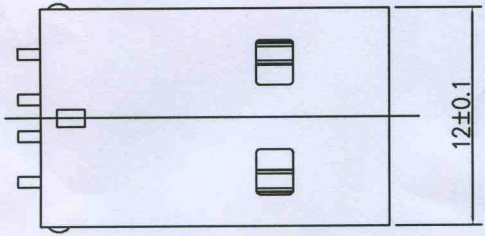
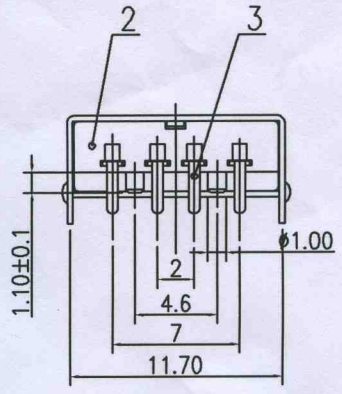


F:\CZT\USB1394\24

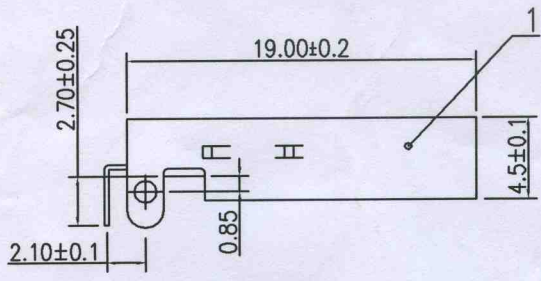

Specification

Housing: Thermoplastic, UL94V-0
 Temperature Range: -20°C to +85°C
 Contact: Copper Alloy
 Shell: Steel
 Voltage Current Rating: 1AMP.30V AC
 Insulation Resistance: 1000M Ω Min
 Contact Resistance: 30m Ω Max
 Dielectric Withstanding Voltage: 500V AC
 Tolerances unless otherwise specified:
 0-10:±0.15; 10-20:±0.2; 20-30:±0.25

受控文件
 ACCEPT CONTROL FILE

Enrol						
Tracing	3	J	PCB USB TERMINAL	4	Qsn 6.5-0.1	
	2	X	PCB USB HOUSING	1	PA66	
Tracing	1	W	PCB USB POINT PEG SHELL	1	08F	
	NO.	CODE	P/N	QTY	MATERIAL	REMARK
Signing					USB-A1D1M- □□4□ USB A1 DIP90°PLUG POINT PEG 4.6 PITCH(000)	F:\CZT\USB1394\24
						Drawing Marking Weight Scale 2.5:1
Date	Design	Collate	Criterion	Examine	Approval	Common Page Page
	Technics		Date			CZT

工程
 2005-7-22
 陳鴻儒