

Order Information

MIN-A1S F- B4S

Contact plating

0: Gold Flash

1: Au 3μ "

2: Au 6μ "

3: Au 15μ "

4: Au 30μ "

1: Middle Key

2: Single Key

3: Double Key

Specification

Housing: Thermoplastic, UL94V-0

Contact: Copper Alloy

Shell: Steel



Voltage Current Rating: 1AMP.30V AC

Insulation Resistnce: 100MΩ Min


Contact Resistance: 50mΩ Max

Dielectric Withstanding Voltage: 100V AC


Temperature Range: -50℃ to+85℃

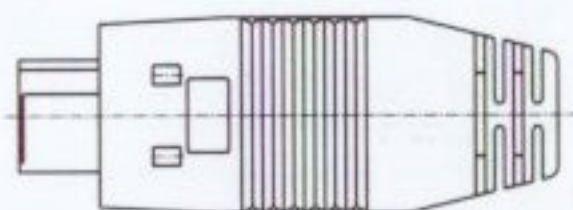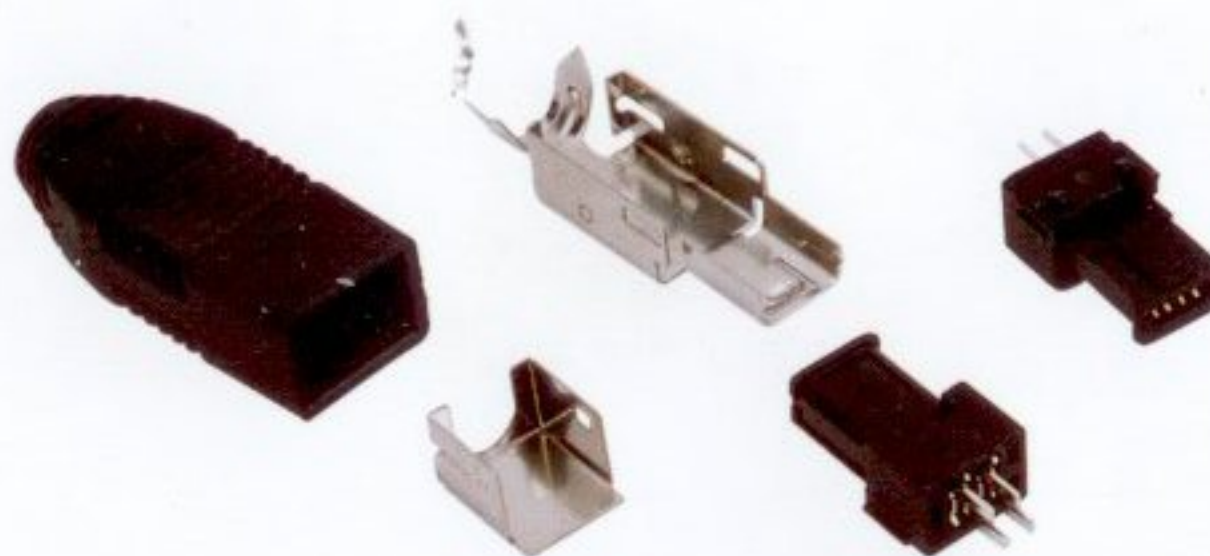



SINGLE KEY

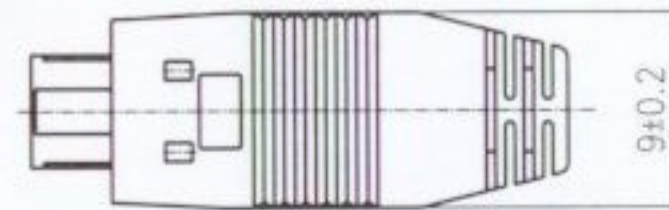

MIDDLE KEY

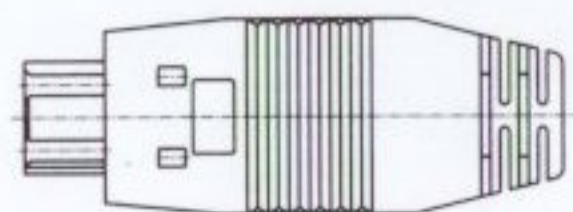

DUAL KEY

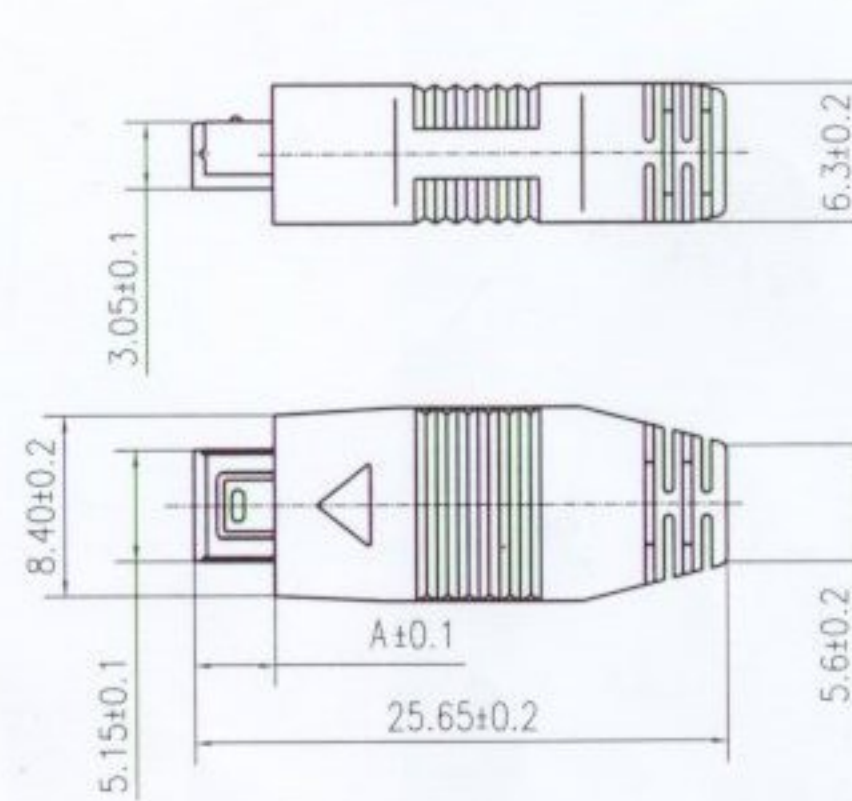

Tolerances unless otherwise specified:
0-1±0.05, 1-10±0.1, 10-20±0.15, 20-30±0.2

A	6.0	4.7	4.0
---	-----	-----	-----