
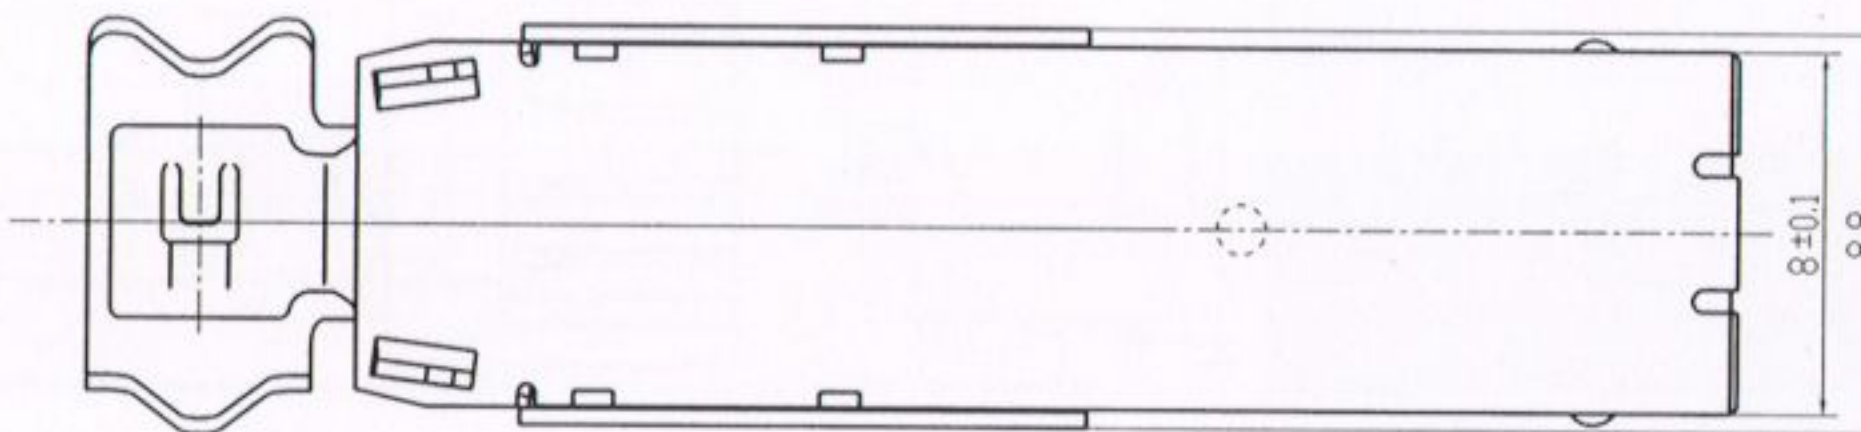
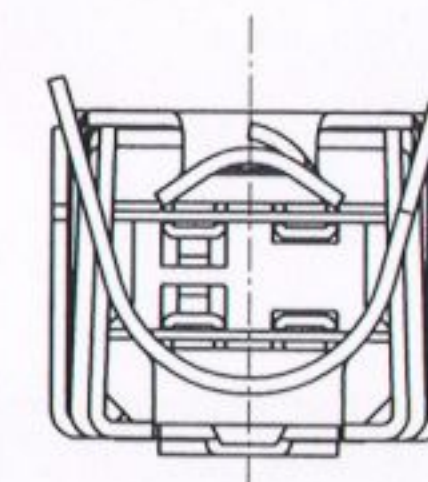
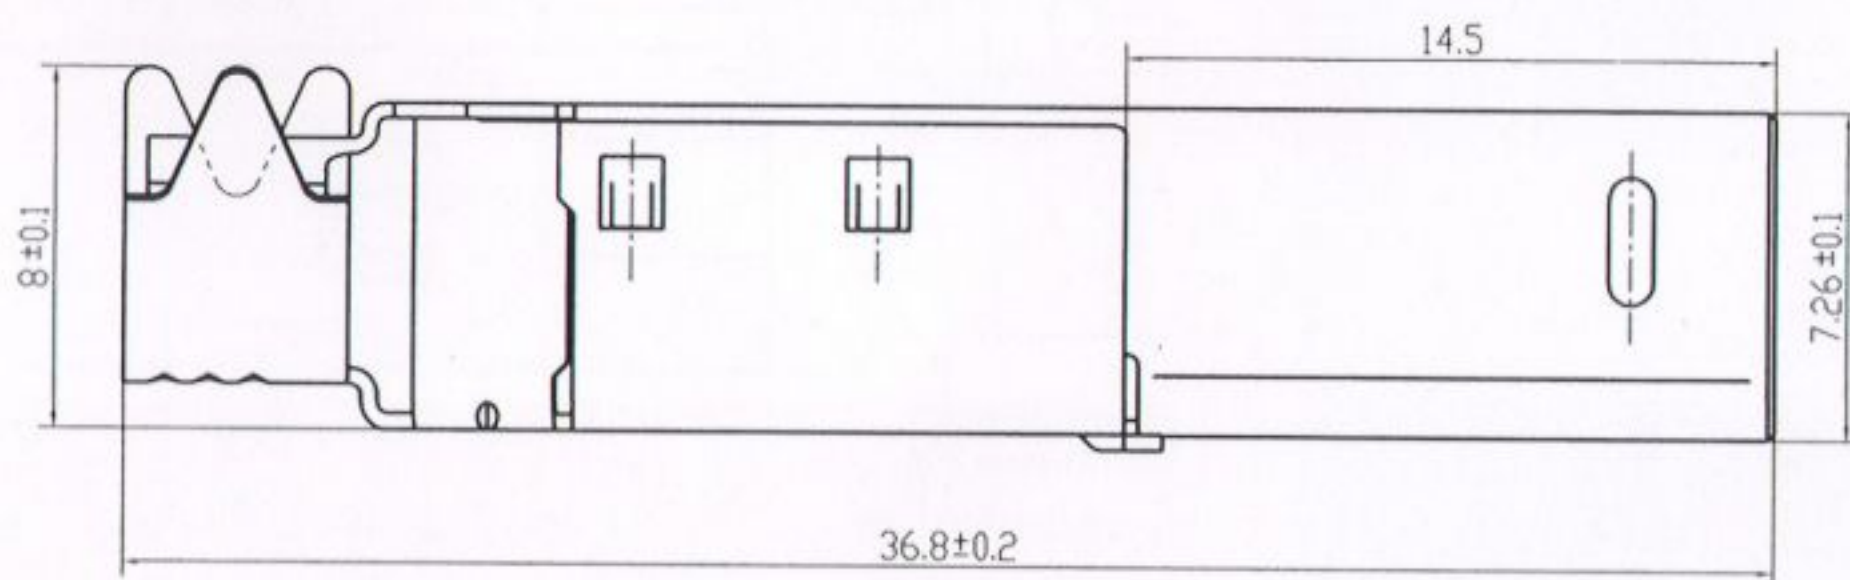


### USBP-1B-SX-C

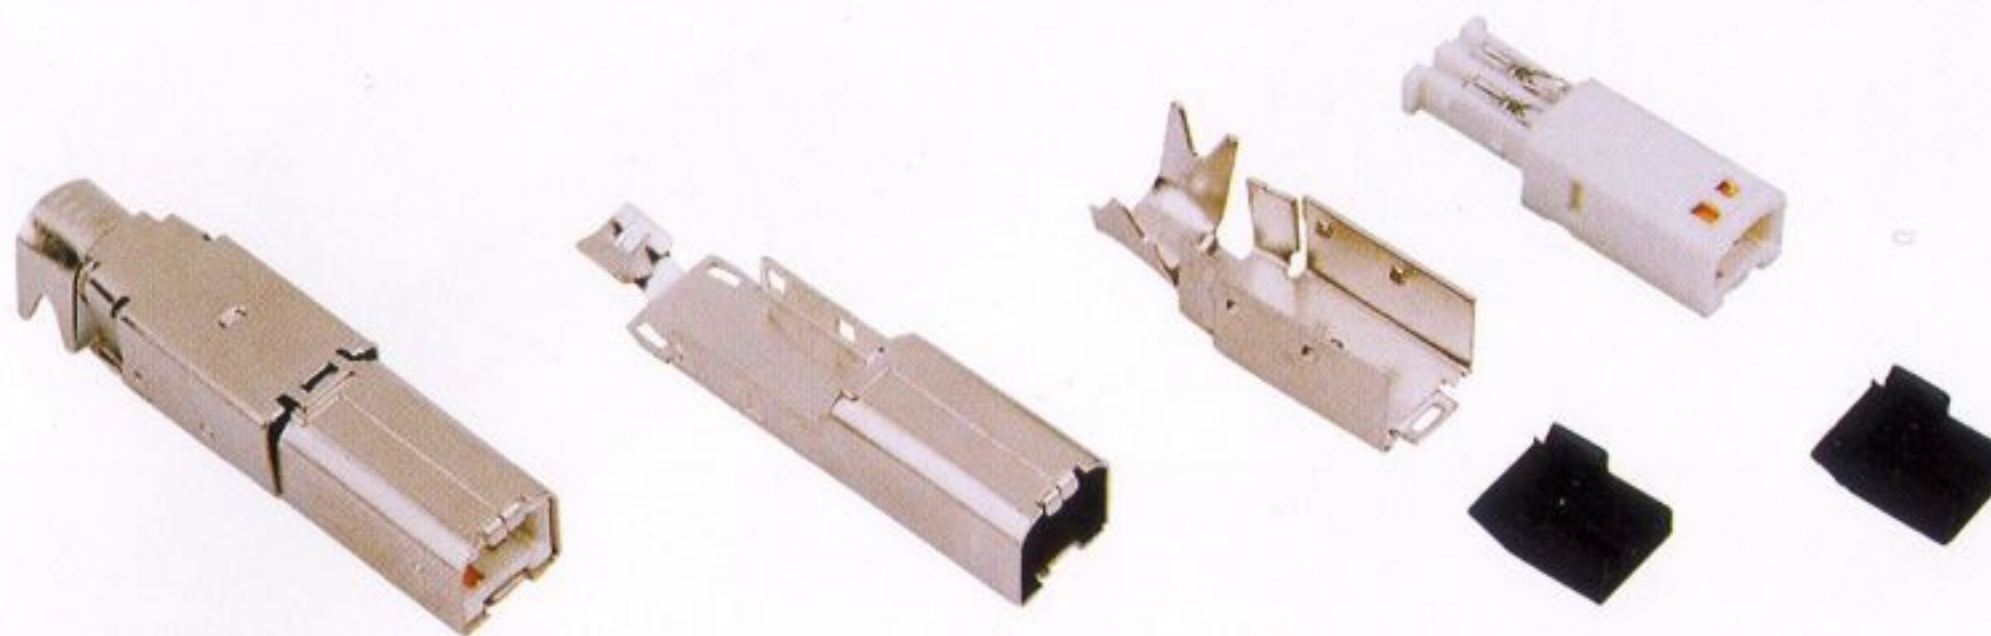

### Specification

- Housing: Thermoplastic, UL94V-0
- Temperature Range: -20°C to +85°C
- Contact: Copper Alloy
- Shell: Steel
- Voltage Current Rating: 1AMP.30V AC
- Insulation Resistnce: 1000MΩ Min
- Contact Resistance: 30mΩ Max
- Dielectric Withstanding Voltage: 500V AC

Tolerances unless otherwise specified:  
 0~1±0.05, 1~10±0.1, 10~20±0.15, 20~30±0.2.