

Display Series

NEW

VIA

VID-2215

15" Vision Intelligence
Display Industrial LCD
Monitor



Features

- 15" TFT color active Matrix Liquid Crystal Display
- New LED backlight, high luminance 400nits
- XGA 1024 x 768 native mode
- VGA/15 Pin D-Sub & HDMI signal input (The HDMI port will only support display input function, but not available for audio input.)
- All aluminum housing design
- Wall mount VESA screw holes: 75 x 75, 100 x 100 (mm)
- Front bezel waterproof
- 5-wire resistive touch screen
- Video/S-Video/audio input options

Specifications


Part Number	VID-2215-1R1A1	
Display Specifications	LCD Display	15" active matrix TFT XGA LCD module
	Resolutions (pixel)	1024 x 768, XGA
	Active Area	304.128 (H) x 228.096 (V)
	Pixel Pitch	0.29 x 0.29 (mm)
	Luminance	400 cd/m2
	Contrast Ratio	700 : 1 (typical)
	Support Color	262k
	Lamp Life Time	50000
	Scan Frequency	Horizontal: 30 to 75KHz / Vertical: 50 to 75 Hz
	Viewing Angle	160°/140° (H/V)
	Response Time	8ms (tf + tr)
	Input Signal	R/G/B Analog
	Signal Type	15-pin D-sub
	OSD Controls/Button	Power, auto, menu / enter, up, down
	Power Consumption	30W (Max.) /Standby under 4W
Power Management	VESA DPMS	
AC/DC Adapter	Input: AC 100~240, 50~60HZ; Output: DC 12V/ 3.0A	
Signal Options	S-Video & Video-input	
Touch Screen Options	5-wire resistive antiglare	
Mechanical Specifications	Construction	Aluminum
	Mounting Options	Desktop, wall mount, embedded
Environment	Operating Temperature	-10°C up to 70°C
	Operation temperature list with adapter	-10 ~ 40°C
	Operation temperature list without adapter	-10 ~ 70°C
	Relative Humidity	Less than 85%
	EMC Approved	CE, FCC

Ordering Information

Part Number	Description
VID-2215-1R1A1	15" Vision Intelligence Display Industrial LCD Monitor



Dimensions

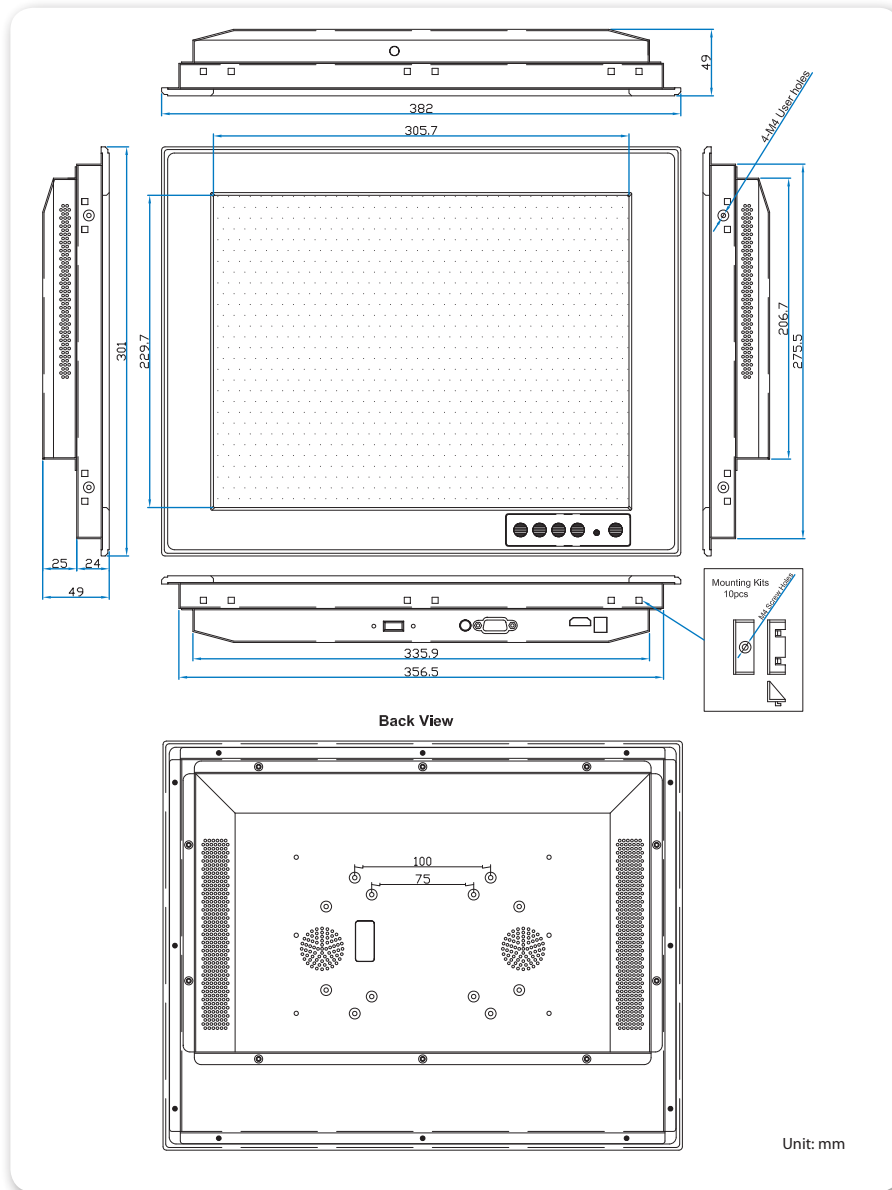

Packing List

- 1 x Touch panel cable
- 1 x VGA cable
- 1 x AC power adapter
- 1 x AC power cable
- 1 x Touch screen USB cable/ touch pen/ driver CDROM