
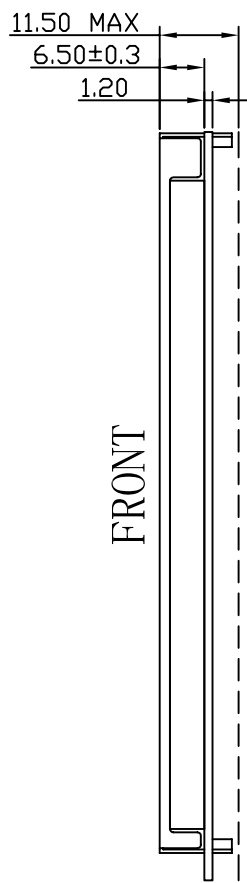


REV.	CHANGE CONTENT	BY	DATE

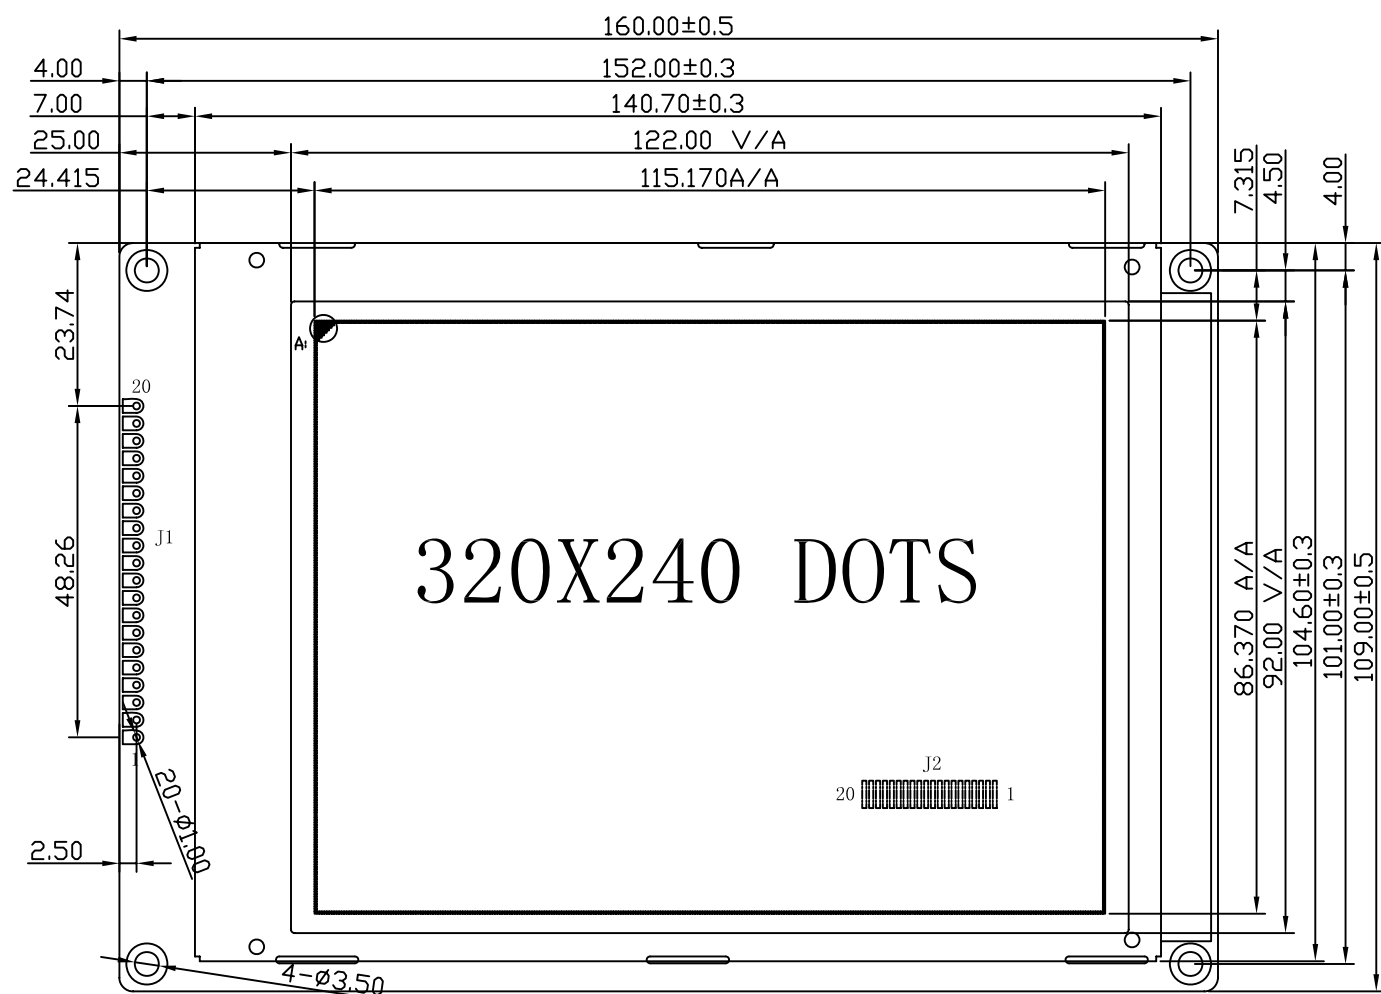

J1, J2:

PIN	SYMBOL
1	VSS
2	VDD
3	V0
4	/WR
5	/RD
6	/CS
7	A0
8	/RST
9	DB0
10	DB1
11	DB2
12	DB3
13	DB4
14	DB5
15	DB6
16	DB7
17	LEDA
18	VDUT
19	LEDA
20	LEDK

- NOTE:
1. DISPLAY TYPE : FSTN-TRANSFLECTIVE/POSITIVE/ANTI-UV
 2. VIEWING DIRECTION : 12: 00
 3. OPERATING VOLT. : VOP=24.0V
 4. OPERATING TEMP. : -20°C~+70°C
 5. STORAGE TEMP. : -30°C~+80°C
 6. DRIVE METHOD : 1/240DUTY, 1/16BIAS, VDD=5.0V
 7. BACKLIGHT : LED(white) ILED<135mA Vf:3.1V
 8. CONTROLLER : RA8835AP3N
 9. ROHS COMPLIANT

深圳市华远显示器件有限公司

华远显示

DRAWING No. : HYG32024027T-FFC2L-VD			
DRAWING TITLE: LCM DRAWING			
FILE NO.: 7			
DESIGN	DAP	20101203	STANDARD
CHECKED			TECHNOLOGY
APPROVED			Q.A
REV. : A		SCALE : -	
PROJECTION:		UNIT : MM	
		SHEET : 1/1	