

NOTE 1

ITEM 項目	PARTS NAME 零件名稱	Q'TY 數量	MATERIAL 材質	FINISH/REMARK 處理/備註
1	HOUSING	1	NYLON	UL-94V-0 (Black)
2	TOP COVER	1	A.B.S	-----
3	BOTTOM COVER	1	A.B.S	-----
4	BUTTON	2	A.B.S	COLOR:黑色(FOR A11-550-1812)
	BUTTON	2	A.B.S	COLOR:灰色(FOR A11-550-1813)
5	LATCH(R)	2	STAINLESS	Non-plating
6	LATCH(L)	1	STAINLESS	Non-plating
7	CONTACT	18	Phosphor Bronze	Gold flash selective
8	SCREW	2	C1018	-----

SPECIFICATION

MATERIAL

See drawing
STANDARD DATA

Rating current:0.5A

Operating temperature: -30?XC ~ +60?XC

Storage temperature: -40?XC ~ +85?XC

ELECTRICAL

Insulator resistance: 1000M ohms Min. @ 250 VDC

Withstanding voltage: 100 VAC / minute

Contact resistance: 50 m ohms Max.

MECHANICAL


Mating force: 30N(3.06kgf) Max.

Unmating force (Without lock): 4.2N(0.43kgf) Min.

Durability: 10000 cycles Min.

Contact retention force: 4.2N(0.43kgf) Min

PART NO.

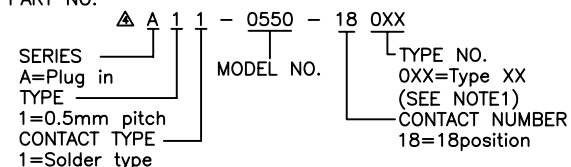

REV. 版本	ECN NO. 設變號碼	MARK 記號	REVISIONS 設變內容	SIGN 修改	DATE 日期
E	EXXXX-XXX	Δ X 2	新系統料號變更	LON	01/27/07'
D	E0411-005	Δ X 2	資料修正	SAM	11/08/04'
C	E0403-002	Δ X 4	資料修正-改尺寸	Vivian Lee	03/26/04'
B	E0311-014	Δ X 1	新增搭配灰色按鍵&外殼材質修正	JIMMY	11/14/03'
A	E0303-002	Δ X 0	-	JIMMY	11/14/03'

UNLESS OTHERWISE SPECIFIED TOLERANCE
尺寸公差

.X ±0.30
.XX ±0.20
ANG. ±5'00"

CHECKED
審核

DESIGNED
設計

APPROVED
承認

DRAWN
製圖

DESIGNED
設計 SAM
11/08/04"

DRAWN
製圖 SAM
11/08/04"

TITLE
產品名稱

UNIT
單位

SCALE
比例

SIZE
尺寸

PLUG IN CONNECTOR
Solder type-18 position

PART NO.
產品料號 Δ A11-0550-18012/18013

DOC. NO.
文件編號 CUT-0550-037

REV.
版本 E

WALTA 華大電子股份有限公司
WALTA ELECTRONIC CO.,LTD.
TEL:886-2-27565688;FAX:886-2-27673342